

I-BLOCK EVO

DESCENDER



Ref. 1388 - 138803

ROPE ACCESS, SELF RESCUE


Auto-braking single rope descender with two locking positions. Descent speed can be controlled up to 2 m/s. Maximum working load: 160 kg (200 kg for rescue scenarios).

Standards:

- EN 12841/C as a descender of the working line for semi-static ropes ranging from 9 to 12 mm.
- EN 341/2A as an emergency evacuation device on a single line, 11 mm semi-static rope (Certified with rope TEUFELBERGER PATRON 11 mm, compatible with rope C.A.M.P. Iridium 11mm).

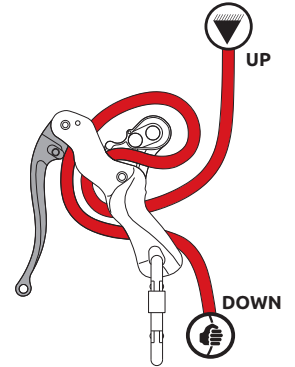

I-BLOCK EVO BLACK
138803

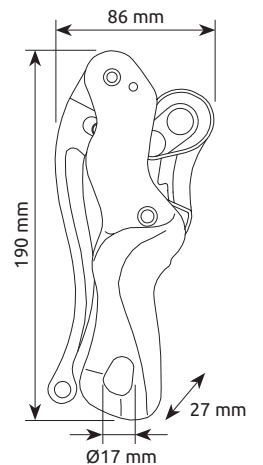

Ref.	Product name	Weight		Breaking load	Rope diameter		CE	STANDARD	Rescue use	EAC
		g	oz		Min - mm	Max - mm				
1388	I-BLOCK EVO	430	15.2	15	9	12	•	•	Max 200 kg	•
138803	I-BLOCK EVO BLACK									